


LEEG | SENSING TOMORROW
智感未来

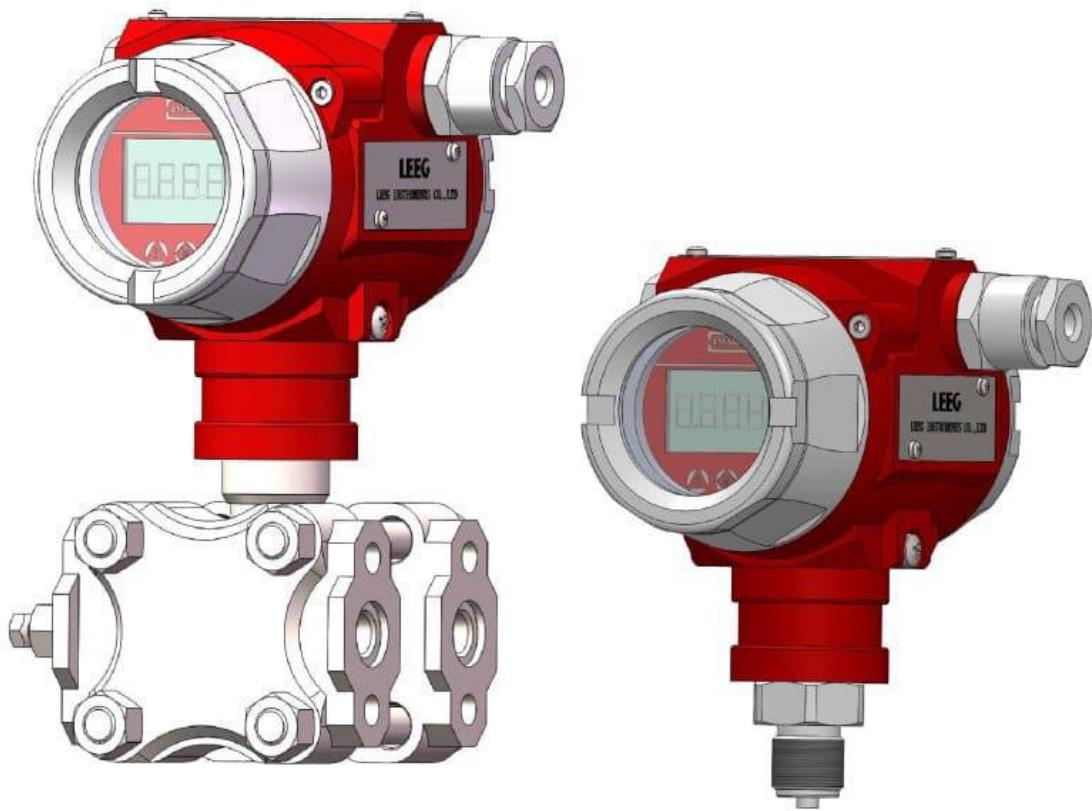

上海立格仪表有限公司
SHANGHAI LEEG INSTRUMENTS CO.,LTD.

Technical advantage
技术优势

New generation technology of piezoresistive monocrystalline silicon pressure transmitter
新一代技术单晶硅压力变送器



Fully isolated construction, high static pressure, high accuracy pressure sensor
全隔离封装高静压高精度压力传感器



New design, high strength aluminium alloy electric protected housing
全新设计高强度铝合金电气保护壳体






Full digital integrated circuits surface mounted technology transmission module
全数字集成电路表面封装变送模块



All parameter settings in the field with 3 operational keys
自带三按键全菜单功能现场操作实现



Transient voltage resistance integrated terminal module
耐瞬变电压保护一体化端子模块



High strength stainless steel flange
高强度优质不锈钢材质夹块法兰



目录
Catalog



DMP305X Piezoresistive monocrystalline silicon pressure transmitter
DMP305X单晶硅压力变送器

4-7



SMP858 Sanitary pressure transmitter
SMP858卫生型压力变送器

8-15



SMP131 Compact pressure transmitter
SMP131紧凑型压力变送器

16-24



LMP633 Submersible level transmitter
LMP633投入式液位变送器

25-28



LG200 Temperature transmitter
LG200温度变送器

29-31



DMP305X Piezoresistive monocrystalline silicon industrial pressure transmitter
DMP305X单晶硅工业型压力变送器



DMP305X Piezoresistive monocrystalline silicon industrial differential pressure transmitter
DMP305X-DST 单晶硅工业型差压变送器

Measuring range: Differential pressure, -500kPa~1MPa, Minimum measuring range: 250Pa
量程范围：差压，-500kPa~1MPa，最小量程250Pa

Output signal: 4~20mA, 4~20mA+HART
输出信号

Accuracy: 0.075%F.S.
精度等级

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述：石化、化工、电力、钢铁、水泥...



DMP305X-TLT Piezoresistive silicon industrial pressure transmitter
DMP305X-TLT 扩散硅工业型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range : 5kPa
Absolute pressure, 0~70MPa, Minimum measuring range : 10kPa
量程范围：表压，-100kPa~70MPa，最小量程5kPa
绝压，0~70MPa，最小量程10kPa

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.075%F.S.
精度等级

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述：石化、化工、电力、钢铁、水泥...



SMP858-DST Piezoresistive monocrystalline silicon industrial flush diaphragm differential pressure transmitter
SMP858-DST 单晶硅工业型隔膜差压变送器



Measuring range: Differential pressure, 0~100mH₂O, Minimum measuring range: 0.5 mH₂O
量程范围: 差压, 0~100mH₂O, 最小量程0.5mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: GB, European standard, American standard, Japanese standard
过程连接: 国标、欧标、美标、日标法兰

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述: 石化、化工、电力、钢铁、水泥...

SMP858-DST Piezoresistive monocrystalline silicon industrial flush diaphragm differential pressure transmitter
SMP858-DST 单晶硅工业型隔膜差压变送器



Measuring range: Differential pressure, 0~100mH₂O, Minimum measuring range: 0.5 mH₂O
量程范围: 差压, 0~100mH₂O, 最小量程0.5mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: GB, European standard, American standard, Japanese standard
过程连接: 国标、欧标、美标、日标法兰

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述: 石化、化工、电力、钢铁、水泥...



SMP858-DST Piezoresistive monocrystalline silicon industrial remote diaphragm differential pressure transmitter
SMP858-DST单晶硅工业型远传隔膜差压变送器

Measuring range: Differential pressure, 0~50mH₂O, Minimum measuring range: 0.5 mH₂O
量程范围：差压，0~50mH₂O，最小量程0.5mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: GB, European standard, American standard, Japanese standard
过程连接：国标、欧标、美标、日标法兰

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述：石化、化工、电力、钢铁、水泥...



SMP858-TLT Piezoresistive silicon standard flush diaphragm pressure transmitter
SMP858-TLT扩散硅标准型隔膜压力变送器

Measuring range: Gauge, -100kPa~10MPa, Minimum measuring range : 5kPa
Absolute pressure, 0~10MPa, Minimum measuring range : 10kPa
量程范围：表压，-100kPa~10MPa，最小量程5kPa
绝压，0~10MPa、最小量程10kPa

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: GB, European standard, American standard, Japanese standard
过程连接：国标、欧标、美标、日标法兰

Application: Petrochemical, Chemical, Power, Steel, Cement...
用途描述：石化、化工、电力、钢铁、水泥...



SMP858-TSF Piezoresistive monocrystalline silicon sanitary pressure transmitter
SMP858-TSF单晶硅卫生型压力变送器



SMP858-TSF Piezoresistive monocrystalline silicon sanitary pressure transmitter
SMP858-TSF单晶硅卫生型压力变送器

Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp(卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁...



SMP858-DSF Piezoresistive monocrystalline silicon sanitary differential pressure transmitter
SMP858-DSF单晶硅卫生型差压变送器

Measuring range: Differential pressure, 0~10mH2O, Minimum measuring range: 0.5 mH2O
量程范围: 差压, 0~10mH2O, 最小量程0.5mH2O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp(卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁...



SMP858-TSF Piezoresistive monocrystalline silicon sanitary level transmitter
SMP858-TSF 单晶硅卫生型液位变送器



Measuring range: Gauge, 0 ~ 2mH₂O, Minimum measuring range: 0.3mH₂O
量程范围: 表压, 0kPa ~ 2MPa, 最小量程0.3mH₂O

Output signal: 4 ~ 20mA, 4 ~ 20mA +HART
输出信号

Accuracy: 0.1%F.S., 0.2%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp(卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁...



SMP858 Sanitary pressure transmitter
SMP858卫生型压力变送器



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD扩散硅卫生型压力变送器



Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: DIN11851 DN25, DN40, DN50 Joint nut(联合螺母)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁

SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD扩散硅卫生型压力变送器



Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: SMS or IDF DN1-1/2", DN2" Joint nut(联合螺母)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD扩散硅卫生型压力变送器

Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: DRD Flange(DRD法兰)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD扩散硅卫生型压力变送器

Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp(卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter with cooling element
SMP858-TLD扩散硅卫生型压力变送器



Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp (卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁

SMP858-TLD Piezoresistive silicon sanitary pressure transmitter with cooling element
SMP858-TLD扩散硅卫生型压力变送器



Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp (卡箍)
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD 扩散硅卫生型压力变送器

Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: G1", G1-1/2" Taper-face sealing, No gasket
过程连接: 锥面密封, 无垫片

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁...



SMP858-TLD Piezoresistive silicon sanitary pressure transmitter
SMP858-TLD 扩散硅卫生型压力变送器

Measuring range: Gauge, -100kPa~2MPa, Minimum measuring range: 10kPa
Absolute pressure, 0~2MPa, Minimum measuring range: 30kPa
量程范围: 表压, -100kPa~2MPa, 最小量程10kPa
绝压, 0~2MPa, 最小量程30kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: G1", G1-1/2"
过程连接

Application: Pharmacy, Food, Milk, Beer, Beverage, Juice...
用途描述: 制药、食品、乳品、啤酒、饮料、果汁...



SMP131 compact pressure transmitter
SMP131紧凑型压力变送器



SMP131-TLH Piezoresistive silicon compact pressure transmitter
SMP131-TLH 扩散硅紧凑型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 5kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 10kPa
量程范围: 表压, -100kPa~70MPa, 最小量程5kPa
绝压, 0~70MPa, 最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



SMP131-TLD Piezoresistive silicon compact pressure transmitter
SMP131-TLD 扩散硅紧凑型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 5kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 10kPa
量程范围: 表压, -100kPa~70MPa, 最小量程5kPa
绝压, 0~70MPa, 最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



**SMP131-TLD Piezoresistive silicon compact pressure transmitter
SMP131-TLD扩散硅紧凑型压力变送器**



Measuring range: Gauge, -100kPa ~ 70MPa, Minimum measuring range: 5kPa
 Absolute pressure, 0 ~ 70MPa, Minimum measuring range: 10kPa
 量程范围: 表压, -100kPa ~ 70MPa, 最小量程5kPa
 绝压, 0 ~ 70MPa, 最小量程10kPa

Output signal: 4~20mA
 输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
 精度等级

Process connection: GB, European standard, American standard thread
 过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
 用途描述: 气动液压自动化设备和生产线

**SMP131-TLN Piezoresistive silicon compact pressure transmitter
SMP131-TLN扩散硅紧凑型压力变送器**



Measuring range: Gauge, -100kPa ~ 70MPa, Minimum measuring range: 5kPa
 Absolute pressure, 0 ~ 70MPa, Minimum measuring range: 10kPa
 量程范围: 表压, -100kPa ~ 70MPa, 最小量程5kPa
 绝压, 0 ~ 70MPa, 最小量程10kPa

Output signal: 4~20mA
 输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
 精度等级

Process connection: GB, European standard, American standard thread
 过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
 用途描述: 气动液压自动化设备和生产线



SMP858-TLD Piezoresistive silicon flush diaphragm pressure transmitter
SMP858-TLD 扩散硅隔膜型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 100kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 100kPa
量程范围: 表压, -100kPa~70MPa, 最小量程100kPa
绝压, 0~70MPa, 最小量程100kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



SMP858-TLD Piezoresistive silicon flush diaphragm pressure transmitter with cooling element
SMP858-TLD 扩散硅隔膜型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 100kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 100kPa
量程范围: 表压, -100kPa~70MPa, 最小量程100kPa
绝压, 0~70MPa, 最小量程100kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



LCD11-D Loop powered LCD display
LCD11-D显示模块



Output signal: 4~20mA two wire
输入信号: 4~20mA 二线制

Power supply: 4~20mA two wire loop power, Maximum voltage drop: 8VDC
供电电源: 4~20mA二线制回路供电工作, 压降最大8VDC

Site operation: 3 operational key, all parameters can be modified at site
现场操作: 三按键, 全部参数可现场修改

Site display: Double row 5 bit/8 bit, 8 section/16 section with backlight LCD display
现场显示: 双排5位/8位, 8段/16段带背光LCD显示

Display range: -19999~99999
显示范围

Accuracy: 0.1%F.S., ±1 digit(位)
精度等级

Switch quantity: Max 2 way PNP for option
开关数量: 最多2路PNP可选; 最多2路PNP可选

SMP131-TLD Piezoresistive silicon compact pressure transmitter
SMP131-TLD扩散硅紧凑型压力变送器



Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 5kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 10kPa
量程范围: 表压, -100kPa~70MPa, 最小量程5kPa
绝压, 0~70MPa, 最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



SMP131-TLD Piezoresistive silicon compact pressure transmitter
SMP131-TLD扩散硅紧凑型压力变送器

Measuring range: Gauge, -100kPa~70MPa, Minimum measuring range: 5kPa
Absolute pressure, 0~70MPa, Minimum measuring range: 10kPa
量程范围：表压，-100kPa~70MPa，最小量程5kPa
绝压，0~70MPa，最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接：国标，欧标，美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述：气动液压自动化设备和生产线



SMP131-TPD Sapphire compact pressure transmitter
SMP131-TPD蓝宝石紧凑型压力变送器

Measuring range: Gauge, -100kPa~260MPa, Minimum measuring range: 5kPa
Absolute pressure, 0~260MPa, Minimum measuring range: 10kPa
量程范围：表压，-100kPa~260MPa，最小量程5kPa
绝压，0~260MPa，最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: National standard thread (国标螺纹)
过程连接

Application: Pneumatic hydraulic automation equipments and production line
用途描述：气动液压自动化设备和生产线



**SMP131-TRD Strain gauge compact pressure transmitter
SMP131-TRD金属应变紧凑型压力变送器**



Measuring range: Gauge, -100kPa~200MPa, Minimum measuring range: 500kPa
 Absolute pressure, 0~200MPa, Minimum measuring range: 500kPa
 量程范围: 表压, -100kPa~200MPa, 最小量程500kPa
 绝压, 0~200MPa, 最小量程500kPa

Output signal: 4~20mA
 输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
 精度等级

Process connection: GB, European standard, American standard thread
 过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
 用途描述: 气动液压自动化设备和生产线

**SMP131-TCD Capacitive ceramic compact pressure transmitter
SMP131-TCD陶瓷电容紧凑型压力变送器**



Measuring range: Gauge, -100kPa~7MPa, Minimum measuring range: 2kPa
 Absolute pressure, 0~7MPa, Minimum measuring range: 5kPa
 量程范围: 表压, -100kPa~7MPa, 最小量程2kPa
 绝压, 0~7MPa, 最小量程5kPa

Output signal: 4~20mA
 输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
 精度等级

Process connection: GB, European standard, American standard thread
 过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
 用途描述: 气动液压自动化设备和生产线



SMP131-TBD Piezoresistive ceramic compact pressure transmitter
SMP131-TBD陶瓷压阻紧凑型压力变送器

Measuring range: Gauge, -100kPa~60MPa, Minimum measuring range: 50kPa
Absolute pressure, 0~60MPa, Minimum measuring range: 50kPa
量程范围: 表压, -100kPa~60MPa, 最小量程50kPa
绝压, 0~60MPa, 最小量程50kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



SMP131-TCD Capacitive ceramic compact pressure transmitter
SMP131-TCD陶瓷电容紧凑型压力变送器

Measuring range: Gauge, -100kPa~7MPa, Minimum measuring range: 2kPa
Absolute pressure, 0~7MPa, Minimum measuring range: 5kPa
量程范围: 表压, -100kPa~7MPa, 最小量程2kPa
绝压, 0~7MPa, 最小量程5kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



**SMP131-DLD Piezoresistive silicon compact differential pressure transmitter
SMP131-DLD扩散硅紧凑型差压变送器**



Measuring range: Differential pressure, -500kPa ~ 7MPa, Minimum measuring range: 10kPa
量程范围: 差压, -500kPa ~ 7MPa, 最小量程10kPa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线

**SMP131-DLD Piezoresistive silicon non-isolated compact differential pressure transmitter
SMP131-DMD非隔离硅紧凑型差压变送器**



Measuring range: Differential pressure, -100kPa ~ 100kPa, Minimum measuring range: 500Pa
量程范围: 差压, -100kPa ~ 100kPa, 最小量程500Pa

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

Application: Pneumatic hydraulic automation equipments and production line
用途描述: 气动液压自动化设备和生产线



LMP633 Submersible level transmitter
LMP633投入式液位变送器



LMP633-BLT Piezoresistive silicon submersible level transmitter
LMP633-BLT扩散硅投入式液位变送器



Measuring range: Static pressure, 0~200mH₂O, Minimum measuring range: 0.5 mH₂O
量程范围：静压，0~200mH₂O，最小量程0.5mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.075%F.S., 0.2%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述：环保、市政、水利的液位测量

LMP633-NLN Piezoresistive silicon submersible level transmitter
LMP633-NLN扩散硅投入式液位变送器



Measuring range: Static pressure, 0~200mH₂O, Minimum measuring range: 0.5 mH₂O
量程范围：静压，0~200mH₂O，最小量程0.5mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述：环保、市政、水利的液位测量



LMP633-NCN Capacitive ceramic submersible level transmitter
LMP633-NCN陶瓷电容投入式液位变送器

Measuring range: Static pressure, 0 ~ 200mH₂O, Minimum measuring range: 0.2mH₂O
量程范围: 静压, 0 ~ 200mH₂O, 最小量程0.2mH₂O

Output signal: 4 ~ 20mA , 4 ~ 20mA +HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述: 环保、市政、水利的液位测量



LMP633-NLN Piezoresistive silicon submersible level transmitter
LMP633-NLN扩散硅投入式液位变送器

Measuring range: Static pressure, 0 ~ 50mH₂O, Minimum measuring range: 0.5mH₂O
量程范围: 静压, 0 ~ 50mH₂O, 最小量程0.5mH₂O

Output signal: 4 ~ 20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述: 环保、市政、水利的液位测量



LMP633-NCN Capacitive ceramic anti-corrosive submersible level transmitter
LMP633-NCN陶瓷电容防腐型投入式液位变送器



Measuring range: Static pressure, 0~20mH₂O, Minimum measuring range: 0.2mH₂O
量程范围：静压，0~200mH₂O，最小量程0.2mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述：环保、市政、水利的液位测量

LMP633-NCN Capacitive ceramic anti-corrosive submersible level transmitter
LMP633-NCN陶瓷电容防腐型投入式液位变送器



Measuring range: Static pressure, 0~20mH₂O, Minimum measuring range: 0.2mH₂O
量程范围：静压，0~200mH₂O，最小量程0.2mH₂O

Output signal: 4~20mA, 4~20mA +HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Application: Environmental protection; municipal works; level measurement of irrigation works
用途描述：环保、市政、水利的液位测量



LG200 Temperature transmitter
LG200温度变送器



LG200-WRT Platinum resistance standard temperature transmitter
LG200-WRT铂电阻标准型温度变送器



Measuring range: -200~600°C, Minimum measuring range: 100°C
量程范围: -200~600°C, 最小量程100°C

Output signal: 4~20mA, 4~20mA+HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹

LG200-WRT Platinum resistance sanitary temperature transmitter
LG200-FRF铂电阻卫生型温度变送器



Measuring range: -200~600°C, Minimum measuring range: 100°C
量程范围: -200~600°C, 最小量程100°C

Output signal: 4~20mA, 4~20mA+HART
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: Tri-Clamp, DIN32676, ISO2852 Clamp(卡箍)
过程连接



LG200-WRK Platinum resistance standard temperature transmitter
LG200-WRK铂电阻标准型温度变送器

Measuring range: -200~600°C, Minimum measuring range: 100°C
量程范围: -200~600°C, 最小量程100°C

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹



LG200-DRD Platinum resistance standard temperature transmitter
LG200-DRD铂电阻紧凑型温度变送器

Measuring range: -200~600°C, Minimum measuring range: 100°C
量程范围: -200~600°C, 最小量程100°C

Output signal: 4~20mA
输出信号

Accuracy: 0.2%F.S., 0.5%F.S.
精度等级

Process connection: GB, European standard, American standard thread
过程连接: 国标, 欧标, 美标螺纹





上海立格仪表有限公司

地址 / 上海市闵行区都会路100号 邮编: 201109

免费技术咨询 / 400-885-5117

电话 / 021-31261976

传真 / 021-31261975

邮箱 / sales@leeg.cn info@leeg.cn

SHANGHAI LEEG INSTRUMENTS CO.,LTD.

A / No.100 Duhui Road,Minhang District,Shanghai China P.C: 201109

T / (86) 21-31261976

F / (86) 21-31261975

E / sales@leeg.cn info@leeg.cn



详细信息请登录我们的网站